





CAMELOT® SLIDING GLASS DOORS

Our premium door provides your home with an entryway that is beautiful, durable and energy-efficient for years to come.

TRANSOM
fixed insulated glass unit mounted above door

SIDELITE
fixed insulated glass unit mounted alongside door

DP-50 Rating Comes Standard. *Only for 5 and 6 ft. doors

Fully-welded tempered insulated sliding glass door available in two or three panels, right or left slide. Nominal sizes are 5', 6', 8', 9'. 12' is available in four panels.

*The fully-welded transom and sidelite options are available as complimentary pieces.

SIZE CHART

Minimum opening	12"	24"	36"	59 ³ / ₄ "	71"	71 ³ / ₄ "	95 ³ / ₄ "	106 ³ / ₄ "	143 ³ / ₄ "
Frame	11 ¹ / ₂ "	23 ¹ / ₂ "	35 ¹ / ₂ "	59 ¹ / ₄ "	70 ¹ / ₂ "	71 ¹ / ₄ "	95 ¹ / ₄ "	106 ¹ / ₄ "	143 ¹ / ₄ "

Height	5 ft.	6 ft.	8 ft.	9 ft.	12 ft.
12"					
80"					
79 ¹ / ₂ "					

*For all order, please allow a minimum of 1/2" clearance for the top and 1/4" clearance on both sides. *Right or Left handed is available; operating panel viewed from the inside.

FEATURES

Outstanding Strength.

Premium, heavy-duty, fully-welded virgin vinyl 0.085" frame and 0.094" sash

Quality Screen.

Extruded locking screen featuring Betterview fiberglass screen wire

Quality Glass.

7/8" tempered insulated glass with optional Solarban 60 Low-E glass

Added Strength.

4" wide sash rails for beauty and added strength

Easy Accessibility.

Exterior key lock

Comfort of Handling.

Contoured shape premier handle set

Multi-Point Lock.

Two lock positions with one turn of the key or thumbturn

Better Ventilation.

2 position venting footlock

Easy Operation.

Heavy-duty adjustable rollers

Easy Glide.

Tempered aluminum sill track for easy glide

QUALIFICATIONS CRITERIA Program Requirements for Windows, Doors, & Skylights: Version 5.0 (April 7, 2009).



Climate Zone	Northern	N. Central	S. Central	Southern
U-Factor ¹	0.30	0.32	0.35	0.60
Equivalent Energy Performance	= 0.31			
SHGC ²	Any	0.40	0.30	0.27
Equivalent Energy Performance	0.35			
	0.40			


¹ Btu/h.ft².°F
² Fraction of incident solar radiation

U-VALUES

	Sliding Glass Door	Picture Window
Low-E/Argon Option	0.30	0.27
Standard Clear	0.45	0.45


OPTIONS

GRIDS

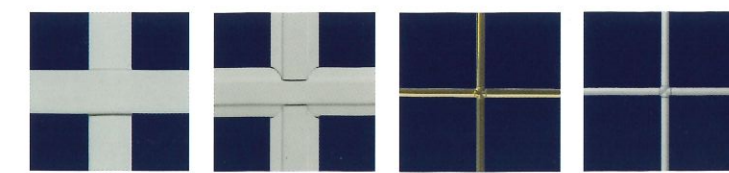

Colonial Standard Colonial Contour Elite Brass Traditional Elite Pewter Traditional

COLORS

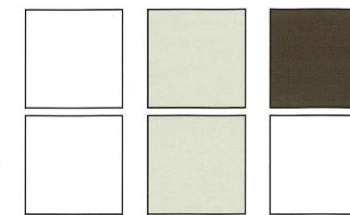

White outside & inside Almond outside & inside Cocoa outside, white inside


HARDWARE



White Almond Cocoa/White Brass Satin Nickel Bronze (hardware standardly matches vinyl color)

FACTORY MULLING

The sliding glass door and transom and/or sidelite can be chosen to be factory mullered together for added strength and customization.

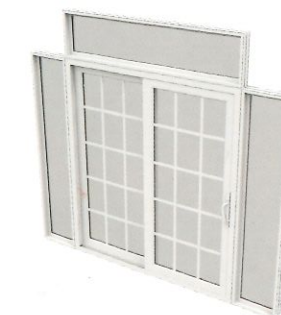

BLINDS BETWEEN GLASS WITH LOW-E GLASS

Internal blinds are installed between two panes of glass which allow your blinds to be adjusted up/down and tilt with minimal effort using slid handles. This configuration keeps your blinds clean and prevents damage.




CUSTOM SIZING

Custom sizing is available in 1/4" intervals for custom fitting of your opening.



STAINLESS COASTAL HARDWARE PACKAGE

Replace door hardware (mortise lock, keeper, door rollers, screen wheels) to better withstand salt water weather conditions.

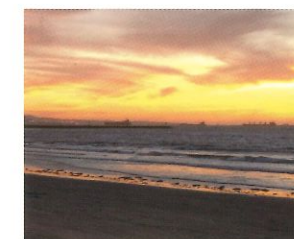

CRUSADER® SERIES WINDOWS




The Crusader® Series is Northeast Building Products' premium window line, precision crafted using only the most advanced technologies. One such technology is Sashlite®, a revolutionary spacer system that integrates the spacer directly into the sash profile.

The result is a window with superior structural strength, industry leading thermal performance, and the highest levels of beauty, quality, value, and style. In testing by an independent lab, Sashlite® windows outperformed and surpassed industry standards for seal durability, air infiltration, water penetration, and structural performance.

Crusader® Series windows feature a wall thickness of .075 and a DP-60 rating on the premier double hung window, the equivalent of withstanding hurricane level winds. This combination of strength, durability, and thermal performance results in one of the most energy efficient windows on the market, helping you lower your energy usage in winter and summer months. The Crusader® Series is the only choice when it comes to true performance in a premium window.

CRUSADER® DOUBLE HUNG WINDOW FEATURES

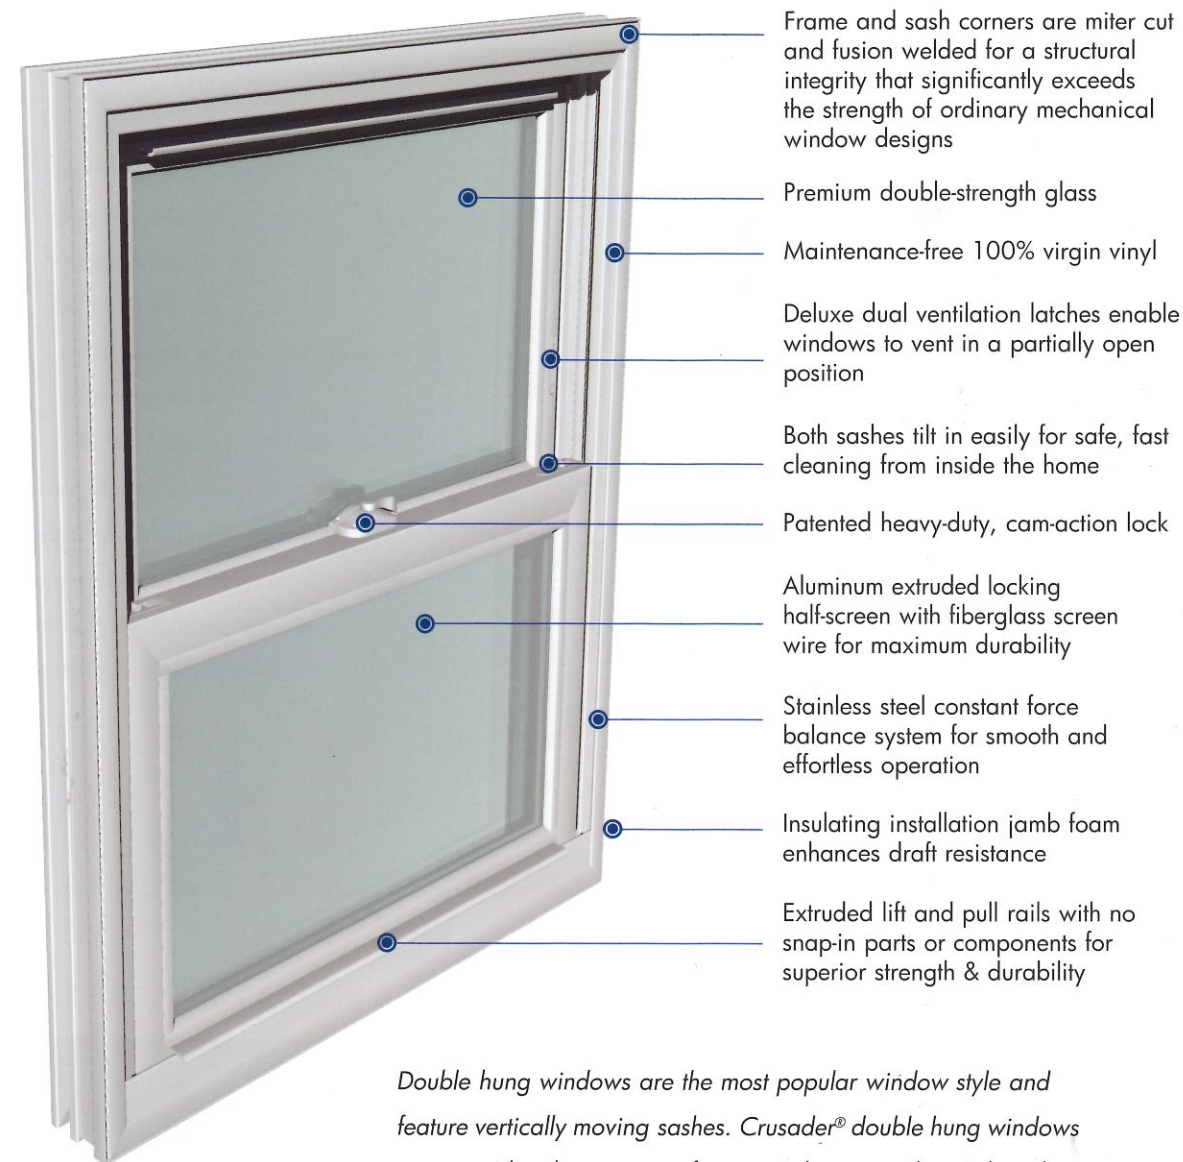


Double hung windows are the most popular window style and feature vertically moving sashes. Crusader® double hung windows represent the ultimate in performance, beauty, value and quality.

Available in:

white
 almond
 cocoa (outside) / white (inside)

Custom colors available - see page 26

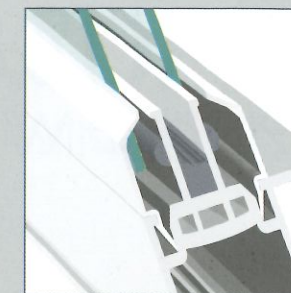

Sashlite® spacer technology provides the highest thermal performance and structural integrity



Reinforced, interlocking sashes provide maximum seal protection where sashes meet



Gold Series double weatherstripping provides superior UV protection and resists mold, mildew and fungus